

HG Gearmotor Provides High Torque in a Compact Package

Up to 1,000 lb-in.

- Offset gearhead provides flexible mounting and high torque in a small package.
- Totally enclosed IP-20 rating. IP-44 with optional t-box kit installed.
- Unvented gearhousing for universal horizontal mounting. Permanently lubricated with high-performance lubricant.
- Industrial lip type seals on motor and output shafts.
- Needle bearings for increased radial load capacity and long life, large ball bearings on the output shaft.
- Hardened helical and spur gearing for quietness and high output to size ratio.



Variable Speed—Pacesetter Inverter Duty AC Gearmotors (230 VAC, 60 Hz, 3-phase)

Fixed Speed Rating					Variable Speed (SOA) Ratings ¹						Radial Load (lbs.)	Product Type	230V Model Number
Speed (rpm)	Torque (lb-in.)	Motor HP	Amps	Gear Ratio	Speed Range (rpm)	Frequency Range (Hz)	Torque Type	Torque @ 10 Hz (lb-in.)	Torque @ 60 Hz (lb-in.)	Torque @ 90 Hz (lb-in.)			
Three -Phase, Inverter duty, Non-synchronous (TEFC)													
16	1,000	3/8	1.9	108	2-21	10-90	variable	896	1,000	896	350	42R6BFPP-HG	2245
30	600			56	3-41			464	776	464			N2247
38	480			45	4-51			373	623	373			N2248
63	289			27	7-85			224	368	224			2249

Fixed Speed—AC Gearmotors (115 VAC, 60 Hz, single-phase)

Speed (rpm)	Rated Torque (lb-in.)	Motor HP	V	Hz	Ph	Amps	Gear Ratio	Radial Load (lbs.)	Capacitor (µF/VAC)	Product Type	Model Number
Permanent Split Capacitor, Non-synchronous (TEFC)											
16	599	1/5	115	60	1	2.7	108	350	30.0/250 (Bodine Part No. 49401090)	42R6BFCL-HG	N5255
30	310						56				5257
38	250						45				N5258
63	150						27				N5259

Permanent Magnet DC Gearmotors (24 VDC or 90/130 VDC)

Speed (rpm)	Rated Torque (lb-in.)	Rated Current (Amps)		Motor HP	Form Factor	Gear Ratio	Radial Load (lbs.)	Product Type ²	Model Number			
		24V	90/130V						24V		90/130V	
									Accy Shaft	No Accy Shaft	Accy Shaft	No Accy Shaft
24V Models With Class F Temperature Rating												
23	680	12	—	1/3	1.0	108	350	33A7BEPM-HG	N6823	N6423	—	—
45	353					56			6845	N6445	—	—
56	284					45			N6856	6456	—	—
93	170					27			N6893	N6493	—	—
90/130V Models With Class F Temperature Rating												
16 / 23	481 / 680	—	1.8 / 2.4	1/6 / 1/3	1.4 / 1.0	108	350	33A7BEPM-HG	—	—	N6323	6023
31 / 45	249 / 353					56			—	—	6345	N6045
38 / 56	200 / 284					45			—	—	N6356	N6056
64 / 93	120 / 170					27			—	—	N6393	6093

¹ SOA: Contact the factory for detailed speed/torque information (Safe Operating Area).

² PMDC PRODUCTS: The fifth digit of the product type changes from "B" to "F" for accessory ready models.

"N" model numbers require lead time and minimum quantities.


HG Gearmotor Provides High Torque in a Compact Package

Up to 1,000 lb-in.

Reference Dimensions

Dimensions (in inches) are for reference only. For CAD drawings and up-to-date specifications, please visit www.bodine-electric.com.

	Weight (lbs.)	XH Length	A Diameter	B Height	C Accessory Shaft	Lead/Cord Length (in.)
42R6-HG	9.5	9.855	4.73	9.85	No	12
33A7-HG	10.5	10.547	3.39	9.80	Yes	24

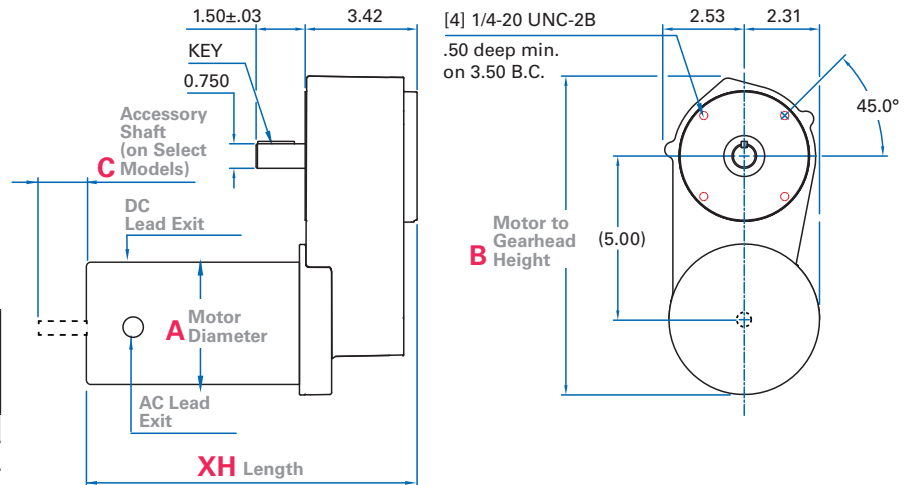

Matched Speed Controls

Bodine motion controls are precisely engineered to provide maximum performance from our motors and gearmotors. When you purchase a Bodine gearmotor and speed control together you get our extended 2-year system warranty.

Our DC controls are available for PMDC motors rated at 90 or 130 VDC, and brushless DC motors rated at 24 or 130 VDC. We also carry a complete line of 3-phase AC inverter controls for variable-speed AC motor applications.

We bring system-matched performance to the next level with our INTEGRAMotor™, which combines a 24 VDC brushless DC motor or gearmotor, a PWM control, and an encoder in one compact high-performance drive package.



2 Year
system warranty